

CURRENT TRANSFORMERS
Model RT2020



WINDOW SIZE: 2.0"

APPLICATION: Ammeters, Watthour Meters, Wattmeters, Relays.

CONTINUOUS THERMAL RATING:
1.33 AT 30C. amb.; 1.0 AT 55 C. amb. Average.

CURRENT RANGE:
100 TO 1600 AAC - * 100 TO 1200 AAC


INSULATION CLASS:

0.6kV.BIL 10kV. Full wave

50-400 Hz

Fully Encapsulated.
Indoor/outdoor applications

Standard 1-amp secondary.
Others Available

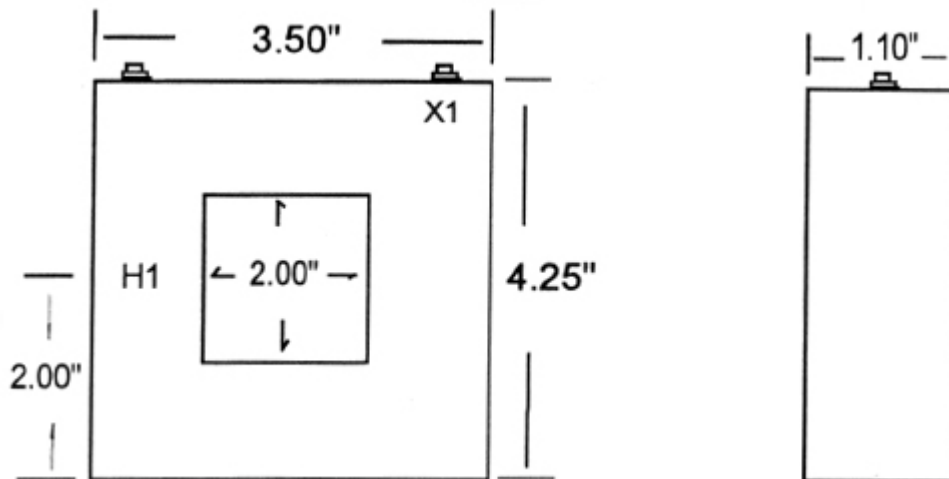

Model RT2020-**

- Terminals are brass. No 10-32 UNC with one flatwasher and lockwasher.
- Additional ratios available
- Approximate weight 1 lbs.
- Made in United States of America

CATALOG NUMBER	CURRENT RATIO AMPERES	V.A. FOR +- 1% CLASS	ANSI METERING CLASS AT 60Hz			
			BO.1	BO.2	BO.5	BO.9
**100	100:1	1.2	2.4	-	-	-
**150	150:1	2.5	1.2	2.4	-	-
**200	200:1	5.0	0.6	1.2	-	-
**250	250:1	7.5	0.6	1.2	1.2	-
**300	300:1	10.0	0.6	0.6	1.2	2.4
**400	400:1	15.0	0.3	0.3	0.6	1.2
**500	500:1	25.0	0.3	0.3	0.6	1.2
**600	600:1	25.0	0.3	0.3	0.6	0.6
**750	750:1	30.0	0.3	0.3	0.6	0.6
**800	800:1	30.0	0.3	0.3	0.6	0.6
**1000	1000:1	35.0	0.3	0.3	0.3	0.6
**1200	1200:1	40.0	0.3	0.3	0.3	0.3
**1500	1500:1	40.0	0.3	0.3	0.3	0.3
**1600	1600:1	50.0	0.3	0.3	0.3	0.3